




Technical Datasheet

tasker® TSK74 – 2x1,50 mm²

Siliconic Flat Audio Divisible Cable for High Temperature

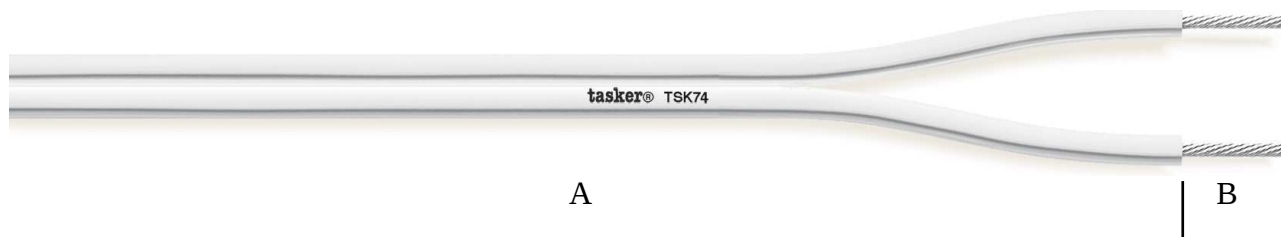

CATEGORY Flat Divisible Audio Cable
APPLICATIONS Medical, water park, beauty center, harsh environment and temperature

A: Extra Soft White Silicon Rubber sheath.
Outer cable dimension 2,80x5,60 (±0,20) mm.

B: Both conductors in O.F.C. Tinned Copper.
Stranded formation 30x0,25 mm.
Nominal cross section 2x1,50 mm².

MARKING **tasker® TSK74 - 2x1,50 mm² - O.F.C. – Siliconic Audio Cable - Temp. Range -**
60/+180°C – Made In Italy
CUSTOM PRODUCTION This product may be custom produced also in **L.S.Z.H.** polymer, **PE**, **PVC** or **PUR**.

Conductors Properties

Conductor Resistance	13,70 Ω/Km
Max Rated Voltage U₀/U	300/500 V
Min. Bending Radius	4xouter Ø
Operative Temperature	-60/+180°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego	X	Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.17
	X	Outdoor	Esterno		X	Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			