




Rating	12V DC 20A MAX	
Insulation Resistance	DC 500V 100M ohm Min.	
Dielectric Strength	AC 1500V 1 minute	
Operation Temperature	-20°C~85°C	



Ground Tab ⊖

Positive Tab ⊕

Quick Terminal(.250")





Description:


- * Water resistant sealing cap
- * SeaLink locking system
- * Easy to install with the locking ring for rear access installation
- * Compatible with standard CLA plugs

③

④
DATE CODE
YM(年月)

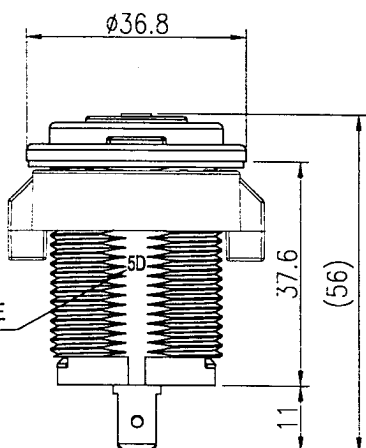

Nut



⑤

Tolerances ±0.2 Unless Otherwise Specified

09/02/15	黃洋	修正外觀圖,底蓋刻字A13-142A刪除“A”				⑤
04/24/15	劉嘉麗	增加DATE CODE。				④
06/07/10	方婷鳳	取消注解。				③
06/11/07	許庭禎	螺帽及螺紋外徑加注公差(提升螺帽搞扭力強度)。				②
03/05/07	許庭禎	螺紋及裝配平面處加注公差。				①
Date	Name	Description				No.
Drawn	Checked	Approved	SCI BOM No.	1250509	Model Name	SeaLink CLA Socket
黃洋	叶志偉	Simon	Customer No.		Model No.	A13-142A-BB1
09/02/15	9/17/15	9/17/15	Unit	mm	Shin Chin Industrial Co., Ltd.	
						Rev. 5