
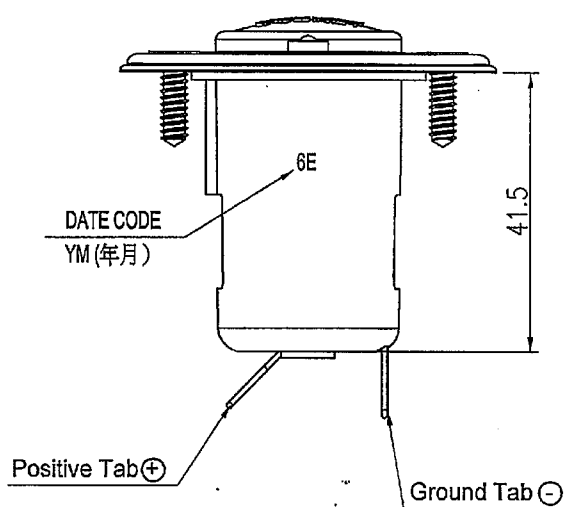
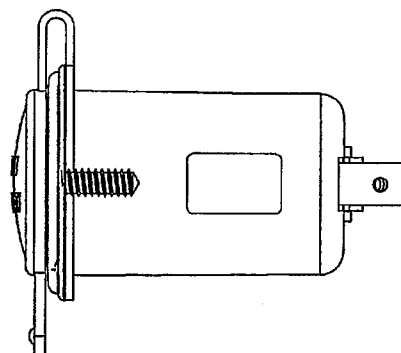


|                       |                       |                                                                 |
|-----------------------|-----------------------|-----------------------------------------------------------------|
| Rating                | 13.6VDC 20A max.      | <div data-bbox="1037 201 1292 515"> <p>Mounting Hole</p> </div> |
| Insulation Resistance | DC 500V 100M ohm Min. |                                                                 |
| Dielectric Strength   | AC 1500V 1 minute     |                                                                 |
| Operation Temperature | 0° ~60°C              |                                                                 |
| Fuse                  | With 20A MGC Fuse     |                                                                 |

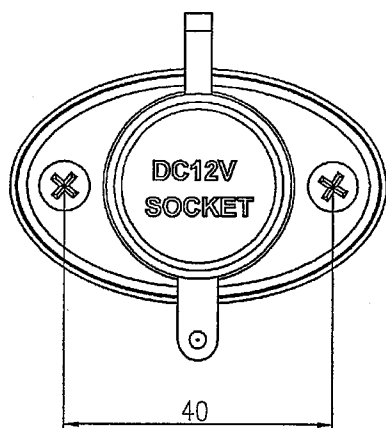

- This socket to fit with  $\phi 21$  plugs.
- Dust cover protection.
- Wire Rating 12Awg.

|          |         |                            |              |         |                                |                |
|----------|---------|----------------------------|--------------|---------|--------------------------------|----------------|
| 04/20/15 | 劉嘉麗     | 本體增加DATE CODE。             |              |         |                                | △              |
| 02/25/05 | 陳麗華     | C1/PDM/A13/A13-106/A13-106 |              |         |                                | △              |
| Date     | Name    | Description                |              |         |                                | No.            |
| Drawn    | Checked | Approved                   | SCI BOM No.  | 1250363 | Model Name                     | Lighter Socket |
| 劉嘉麗      | 叶志伟     | Simon                      | Customer No. |         | Model No.                      | A13-106        |
| 05/09/16 | 5/9/16  | 5/10/16                    | Unit         | mm      | Shin Chin Industrial Co., Ltd. | Rev. 2         |

1250363, 1250508, 1250762