
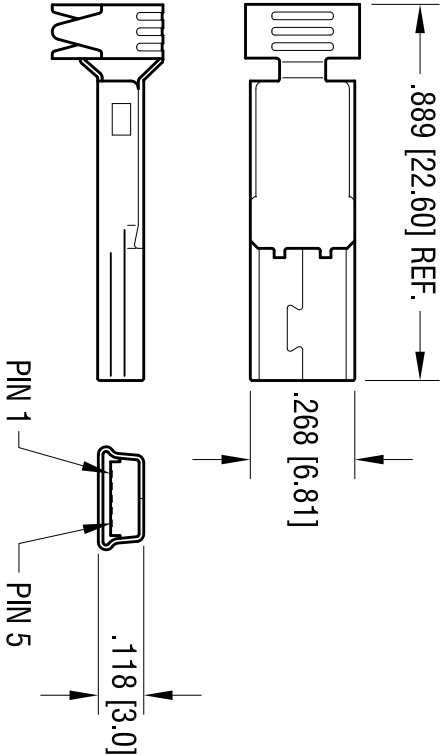



DATE	DESCRIPTION	REV.
5.31.11	CHANGE AS PER ECN 11-072	A

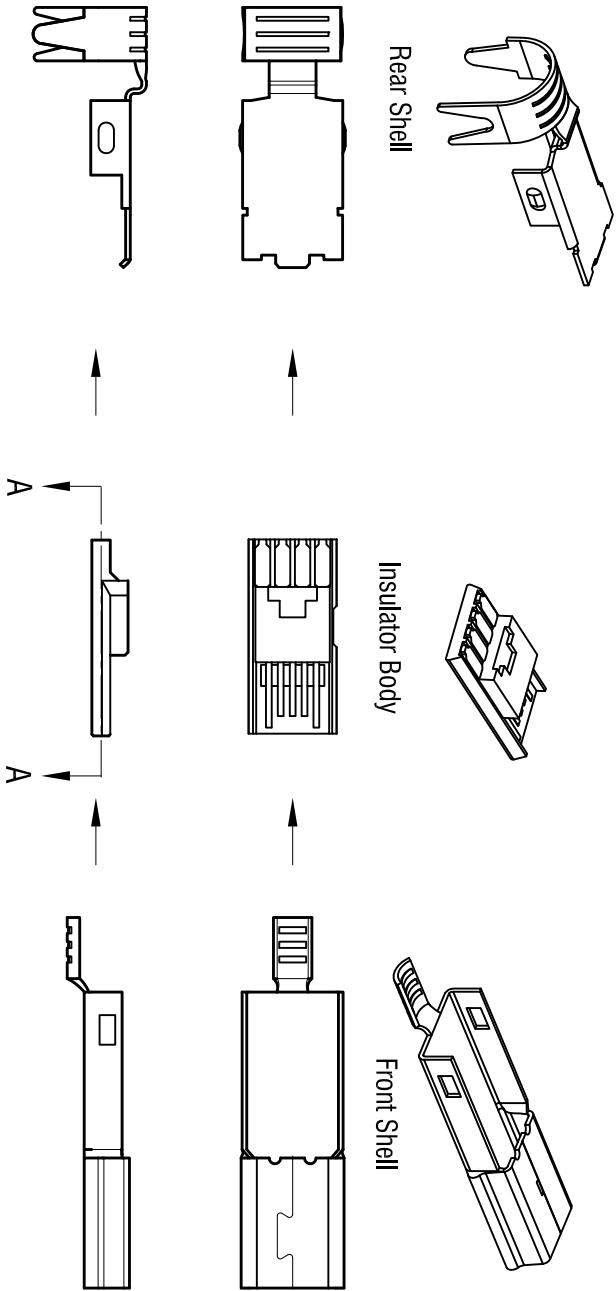

NOTE:

SHELL: MAT'L- STEEL

FINISH: TIN OVER NICKEL PLATING

INSULATION: THERMOPLASTIC, UL 94V-0

CONTACT: MAT'L- PHOSPHOR BRONZE

FINISH: GOLD PLATE ON CONTACT AREA


TIN OVER NICKEL ON SOLDER TAILS

ELECTRICAL CHARACTERISTICS:

CONTACT RESISTANCE: 30m Ω max.

INSULATION RESISTANCE: 1000 MEGA Ω min.

DIELECTRIC WITHSTANDING VOLTAGE : 500 V AC

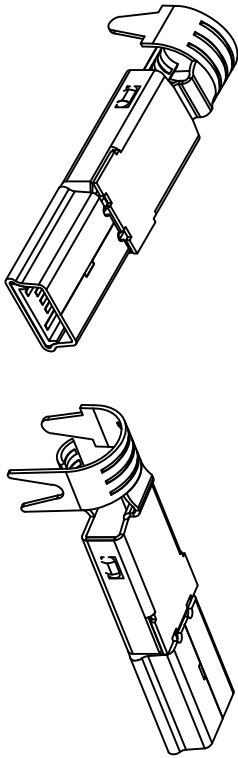

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.			
TOLERANCES	INCH	[MM]	CODE
DECIMAL	$\pm .015$	[± 0.38]	
ANGULAR	$\pm 1^\circ$		C/M
UNLESS OTHERWISE SPECIFIED			

KEYSTONE ELECTRONICS CORP.			
www.keystec.com • ASTORIA, N.Y. 11105-2017 • Tel (718) 956-8900			
PART NAME			

USB MINI PLUG

MATERIAL	AS NOTED		
----------	----------	--	--

FINISH	AS NOTED		
	DRN BY	BOONE	DATE
	App'D	LN	SCALE

935