

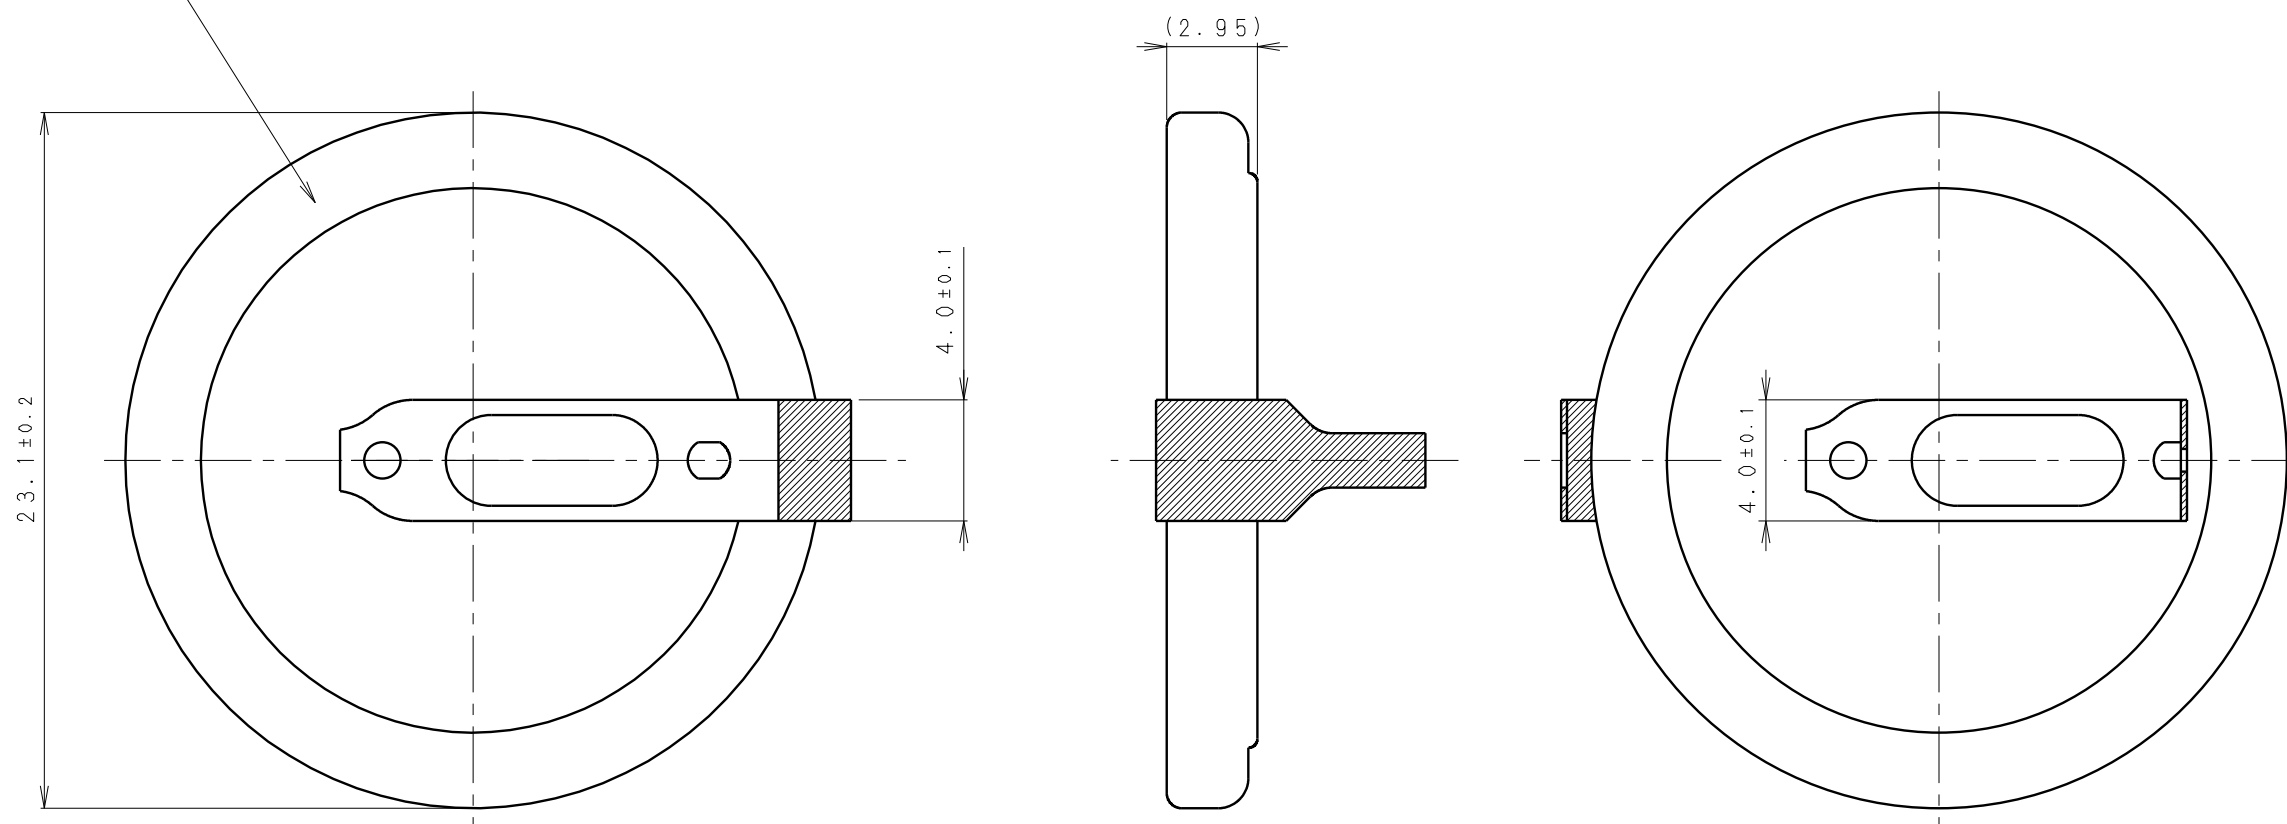



INSULATOR (BROWN)
[絶縁チューブ* (茶色)]

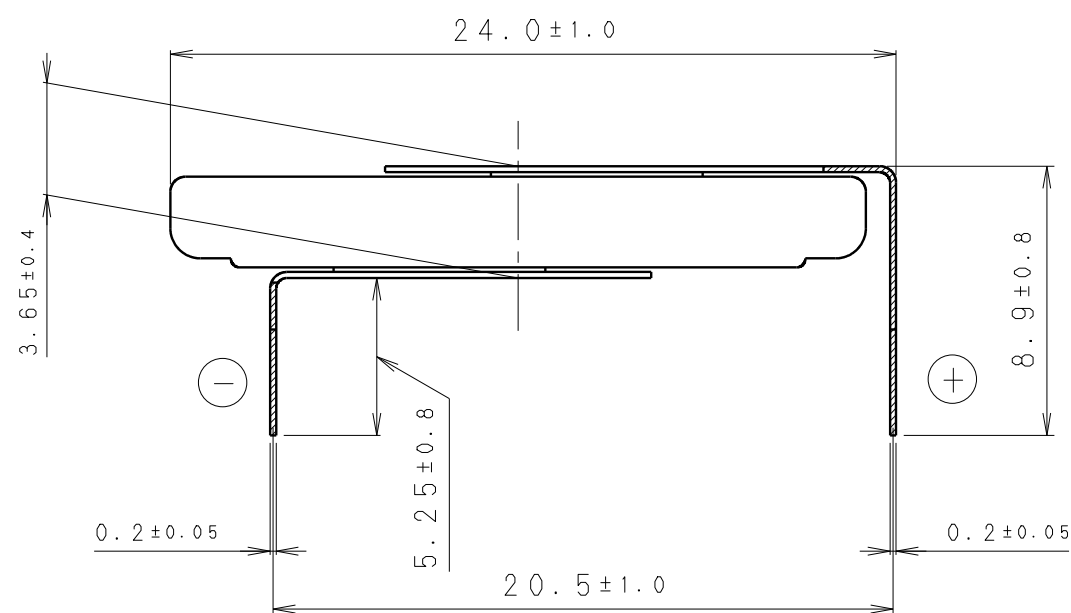

TIN PLATING
(Snメッキ)

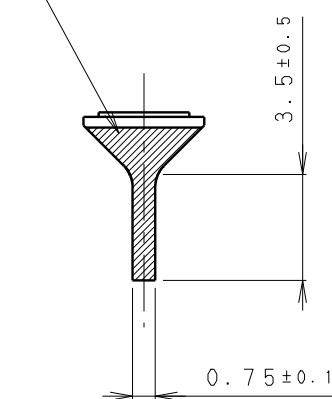

TIN PLATING
(Snメッキ)



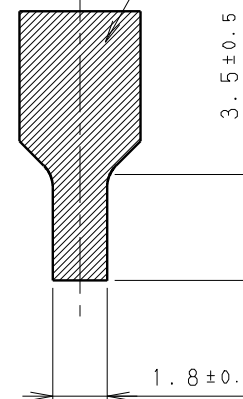


* NOTE [注記]



1. TAB PULLING STRENGTH OVER 19.6N [端子溶接強度: 19.6N以上]
2. TAB MATERIAL: STAINLESS STEEL WITH TIN PLATING
[端子材料: 基材 ステンレス/表面 部分Snメッキ]
3. (): REFERENCE DIMENSION AND ANGLE [() 寸法、角度は参考値]

PRODUCT NO.	VL-2330/HFN	SCALE	
		4:1	
DRAWING NO.	QKHC1Z	REV.	
		0	


INSULATOR (BROWN)
[絶縁チューブ* (茶色)]

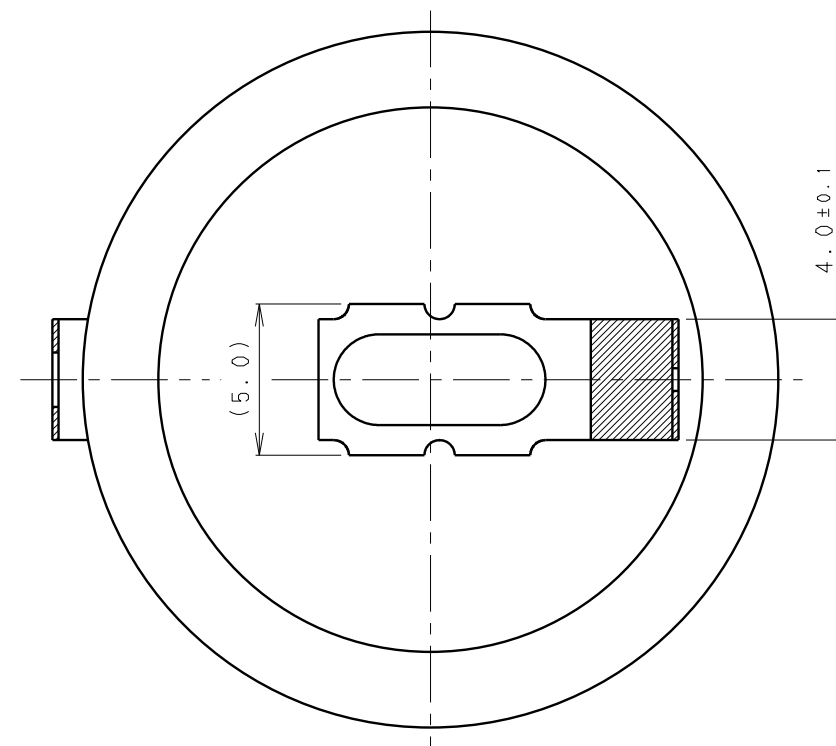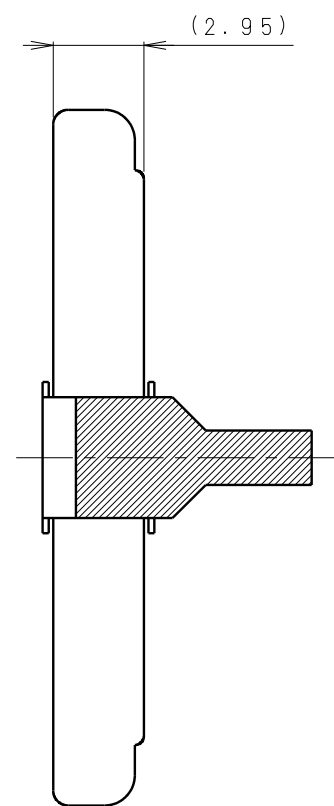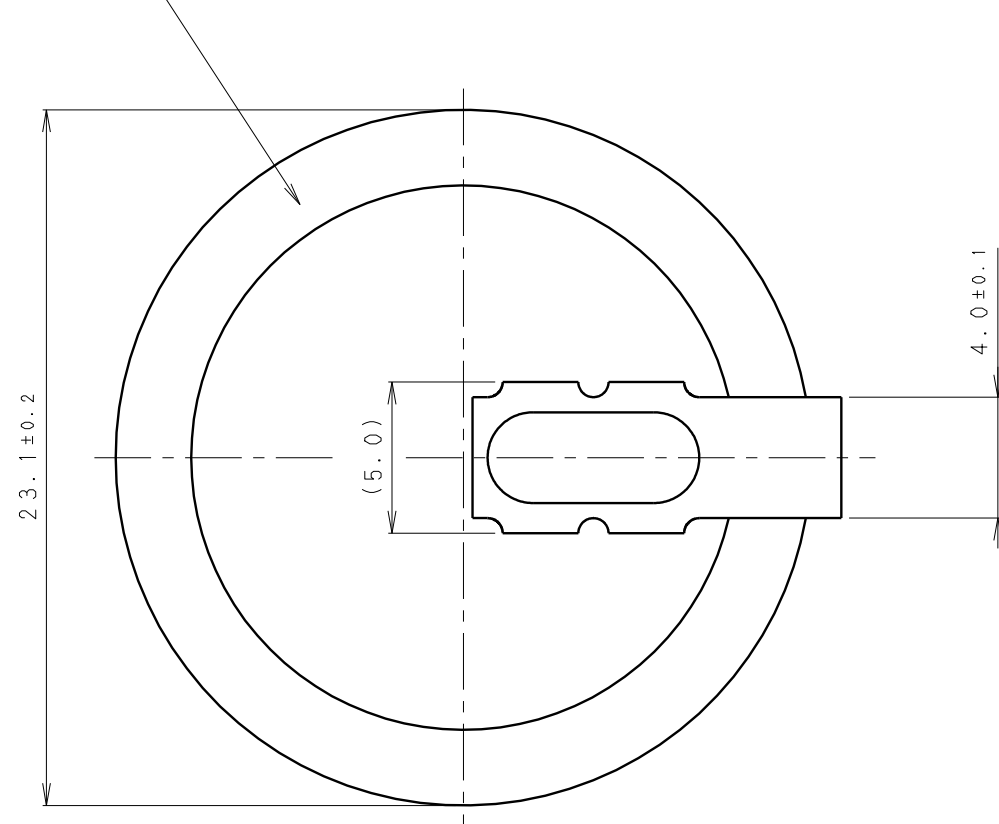

TIN PLATING
[Snメッキ]

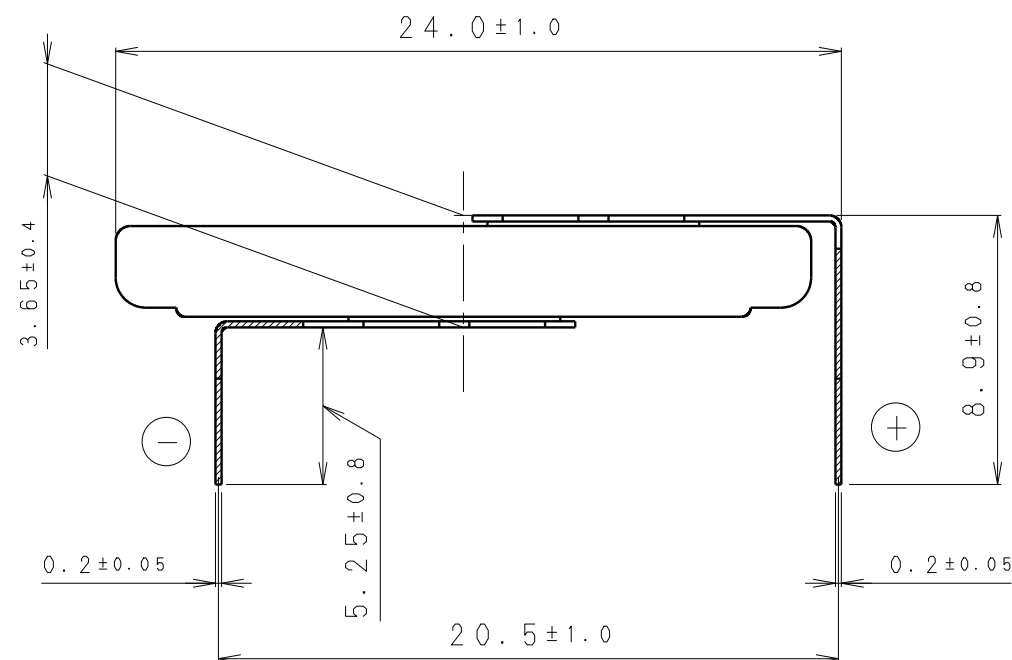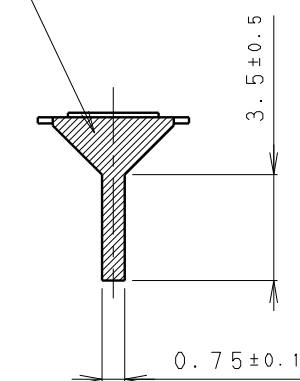

TIN PLATING
[Snメッキ]

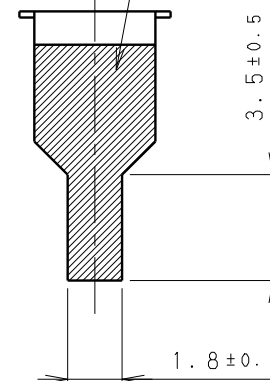

* NOTE [注記]

1. TAB PULLING STRENGTH OVER 19.6N [端子溶接強度: 19.6N以上]
2. TAB MATERIAL: STAINLESS STEEL WITH TIN PLATING [端子材料: 基材 ステンレス/表面 部分Snメッキ]
3. (): REFERENCE DIMENSION AND ANGLE [() 寸法、角度は参考値]

PRODUCT NO.	VL-2330/HFN	SCALE	
		4:1	
DRAWING NO.	QKHD1Z	REV.	
		0	

UNIT:mm