

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE

Technical characteristics:

Specifications

DIN EN 60 664-1


DIN EN 61 984

Inserts

01. Number of contacts :6+PE
02. Rated Current :16A
03. Rated Voltage :500V
04. Pollution degree :3
05. Rated impulse voltage :6kv¹⁰
06. Insulation resistance : $\geq 10^{10} \Omega$
07. Material:Polycarbonate
08. Rated voltage acc.to UL/CSA:600V
09. Limiting temperatures : -40℃~+125℃
10. Flammability acc.to UL94:V0
11. Mechanical working life
(mating cycles) : ≥ 500

Contacts

01. Material:Copper alloy
02. Surface:hard-silver plated
03. Contact resistance : $\leq 1m\Omega$
04. Terminal :Screw terminal
05. Wire gauge :1.0-2.5mm² (AWG 18-14)
06. Tightening torque :0.5Nm
07. Stripping length :7.5mm
08. Rohs Compliance

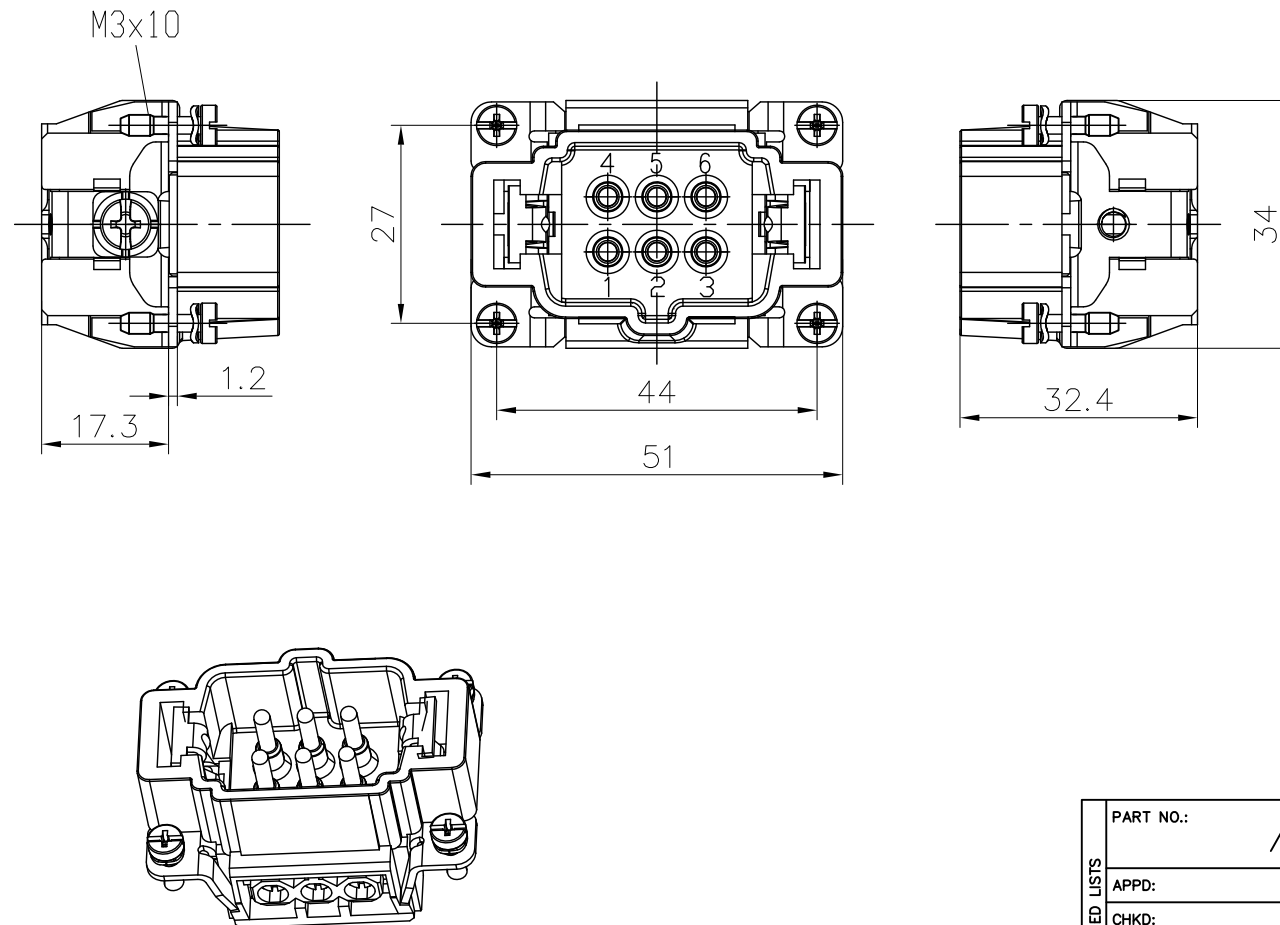

DETACHED LISTS	PART NO.: /	 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME:			
	CHKD:	DE-006-M			
	DRFT: Mr.Yang 2016.08.08	TITLE: CUSTOMER DRAWING		REV	DO
	 THIRD ANGLE PROJECTION		DRAWING NO.: /		SHEET 1/1
			DO NOT SCALE DRAWING	SCALE 1:1	